




## BASETTE B-DIREZIONALI

PER FASCETTE FINO A 3.6 mm

CON ADESIVO **ACRILICO SPECIALE**

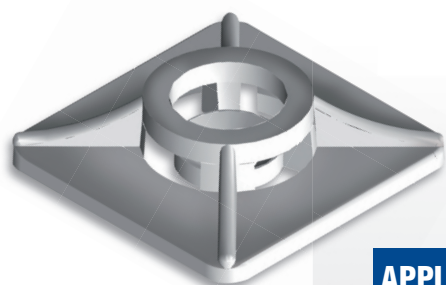

Naturale



Nero

### APPLICAZIONI

Ancoraggio di cavi e tubi  
Civile, industriale, hobbistica.

### CARATTERISTICHE

Supporto adesivo **ACRILICO**  
Temperatura minima applicazione **+10°**.  
Resistenza al calore: del B-adesivo **-40°/100°**  
Su richiesta: **variante in PA 6.6**



**CONFORMI ALLA NORMATIVA  
EUROPEA ROHS**

### VANTAGGI

Facilità di posa.  
Applicabile su quasi tutti i tipi di materiali.  
Adatte per fascette fino a: vedi specifiche

**MATERIALE = ABS**



**TENUTA FIAMMA  
UL94 HB**







**APPLICAZIONE  
IMMEDIATA**

| CODICE<br>Naturale | CODICE<br>Nero | CONFEZIONE<br>pz. |     | IMBALLO<br>pz. | MISURA FASCETTA |
|--------------------|----------------|-------------------|-----|----------------|-----------------|
| 1104HA00CP         | 1104HA01CP     | 50                | 100 | <b>10.000</b>  | <b>MM. 3,6</b>  |
| 1105HA00CP         | 1105HA01CP     | 50                | 100 | <b>5.000</b>   | <b>MM. 4,8</b>  |

**PER ALTRI COLORI O MATERIALI DISPONIBILI CONTATTACI**

| HOLDER                            |                          |
|-----------------------------------|--------------------------|
| Material                          | ABS                      |
| Color                             | natural                  |
| UL Class                          | UL94HB                   |
| UL Yellow Card                    | E 108538                 |
| Temperatur ABS                    | -30° to + 80°C           |
| max. short time temperatur        | +80°C                    |
| ADHESIVE DATA                     |                          |
| Foam                              | Polyethylene closed cell |
| Adhesive                          | special acylic           |
| Foam density kg/m <sup>3</sup>    | 100                      |
| Tensil strength N/cm <sup>2</sup> | 100                      |
| Service temperatur                | -40°C to +100°C          |
| Application temperature           | -15°C to + 40°C          |

| REVISIONS   |      |            |    |
|-------------|------|------------|----|
| REV         | DATE | 18/11/2019 | BY |
| DESCRIPTION |      |            |    |
|             |      |            |    |

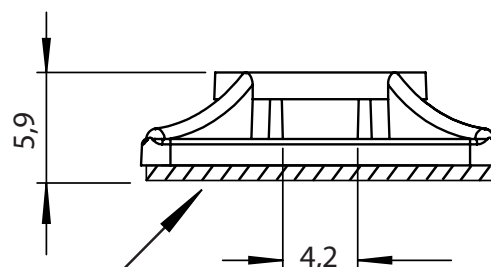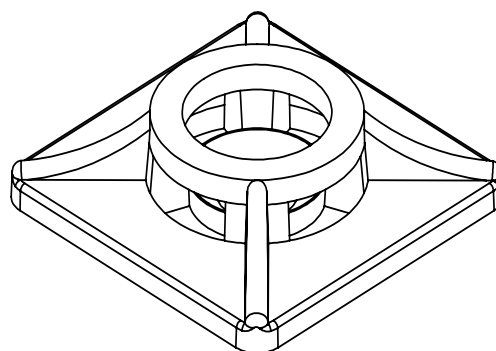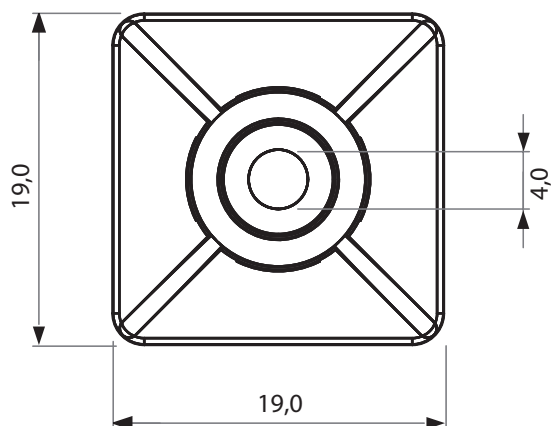

**DOUBLE ADHESIVE TAPE**  
(THICKNESS 1.0 mm)

|                                                                                    |              |                             |          |                                                   |                    |
|------------------------------------------------------------------------------------|--------------|-----------------------------|----------|---------------------------------------------------|--------------------|
|  |              |                             |          | TITLE<br>SELF-ADHESIVE CABLE TIE MOUNT            |                    |
|                                                                                    |              |                             |          | MATERIAL<br>ABS / PA 6.6                          | DATE<br>18/11/2019 |
|                                                                                    |              |                             |          | ADESIVO<br>SPECIAL ACYLIC                         | DRAWN<br>A.G.      |
| PART NUMBER<br>1104HA00CP                                                          |              | DRAWING NUMBER<br>19.1104.G |          | STANDARD COLOR<br>NATURAL / BLACK                 | CHECK              |
| SIZE<br>A4                                                                         | SCALE<br>NTS | UNIT<br>mm                  | REV<br>A | UNLESS OTHERWISE SPECIFIED TOLERANCE<br>SEE ABOVE | APPROVED           |