





BASETTE B-DIREZIONALI PER FASCETTE FINO A 4.8 mm CON ADESIVO **Standard**



Naturale

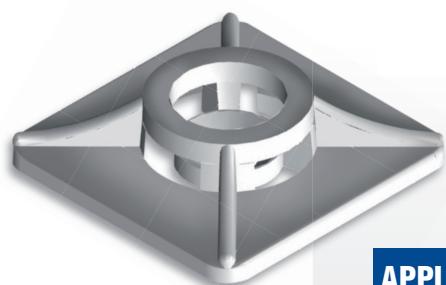

Nero

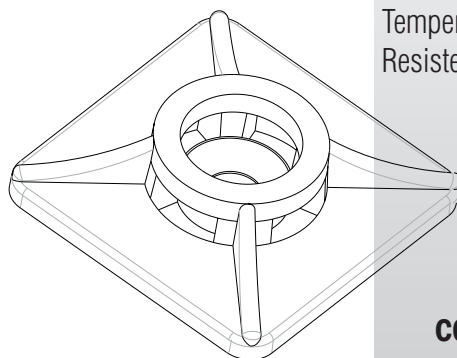

APPLICAZIONI

Ancoraggio di cavi e tubi
Civile industriale hobbistica.

CARATTERISTICHE

Supporto adesivo in schiuma base gomma.
Temperatura minima applicazione +10°.
Resistenza al calore: del B-adesivo -35°+60°

VANTAGGI

Facilità di posa.
Applicabile su quasi tutti i tipi di materiali.
Adatte per fascette fino a: vedi specifiche

MATERIALE = ABS

Su richiesta variante in PA 6.6



**CONFORMI ALLA NORMATIVA
EUROPEA ROHS**

**TENUTA FIAMMA
UL94 HB**




**APPLICAZIONE
IMMEDIATA**

CODICE Naturale	CODICE Nero	CONFEZIONE pz.			IMBALLO pz.	MISURA FASCETTA
1104HA00AS	1104HA01AS	25	50	100	10.000	MM. 3,6
1105HA00AS	1105HA01AS	25	50	100	5.000	MM. 4,8

PER ALTRI COLORI O MATERIALI DISPONIBILI CONTATTACI

HOLDER	
Material	ABS
Color	natural
UL Class	UL94HB
UL Yellow Card	E 108538
Temperatur ABS	-30° to + 80°C
max. short time temperatur	+80°C
ADHESIVE DATA	
Foam	Polyethylene closed cell
Adhesive	STANDARD
Foam density kg/m ³	100
Tensile strength N/cm ²	100
Service temperatur	-30°C to + 60°C
Application temperature	-15°C to + 40°C

REVISIONS			
REV	DATE	18/11/2019	BY
DESCRIPTION			

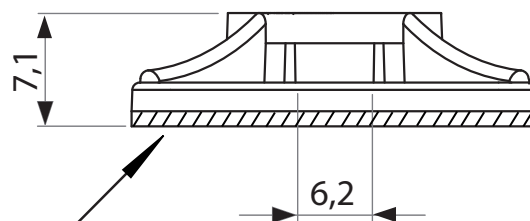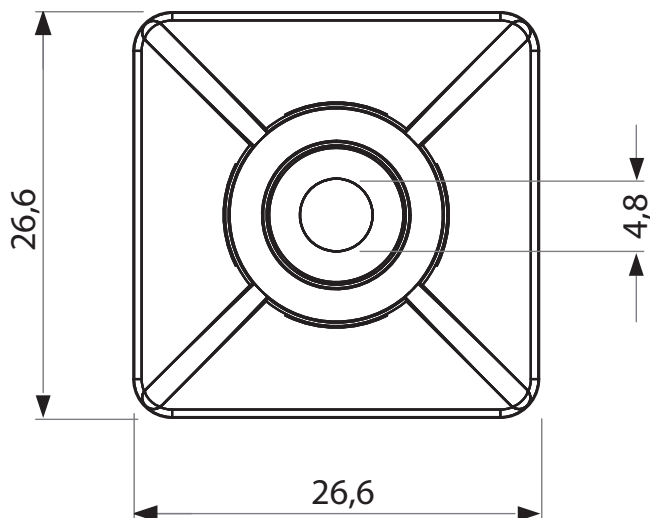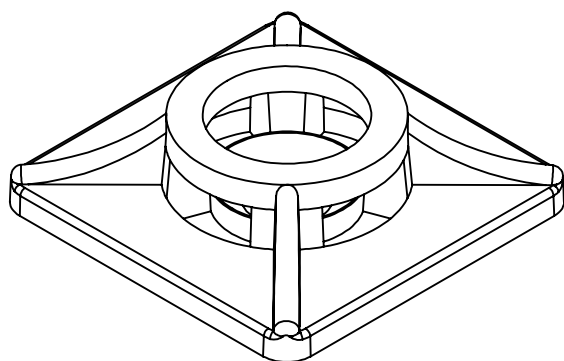

DOUBLE ADHESIVE TAPE
(THICKNESS 1.0 mm)

AGSPLAST

AGSPLAST				TITLE SELF-ADHESIVE CABLE TIE MOUNT	
				MATERIAL ABS / PA 6.6	DATE 18/11/2019
				ADESIVO STANDARD ADHESIVE RUBBER BASE	DRAWN A.G.
PART NUMBER 1105HA00AS		DRAWING NUMBER 19.1105.G		STANDARD COLOR NATURAL / BLACK	CHECK
SIZE A4	SCALE NTS	UNIT mm	REV A	UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE	APPROVED