




BASETTE B-DIREZIONALI

PER FASCETTE FINO A 4.8 mm


CON ADESIVO **ACRILICO STANDARD**

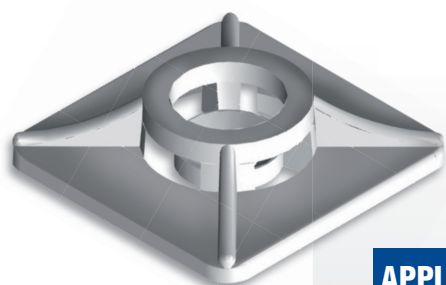

Naturale



Nero

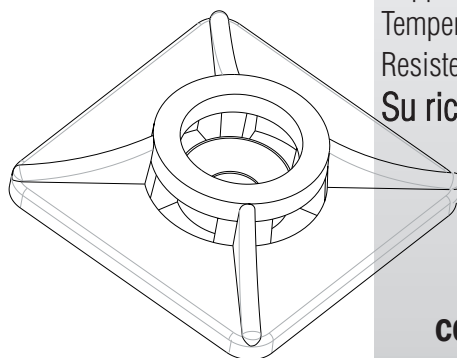

APPLICAZIONI

Ancoraggio di cavi e tubi
Civile, industriale, hobbistica.

CARATTERISTICHE

Supporto adesivo **ACRILICO**
Temperatura minima applicazione **+10°**.
Resistenza al calore: del B-adesivo **-40°/100°**
Su richiesta: variante in PA 6.6



**CONFORMI ALLA NORMATIVA
EUROPEA ROHS**



VANTAGGI

Facilità di posa.
Applicabile su quasi tutti i tipi di materiali.
Adatte per fascette fino a: vedi specifiche

MATERIALE = ABS



**TENUTA FIAMMA
UL94 HB**







**APPLICAZIONE
IMMEDIATA**

CODICE Naturale	CODICE Nero	CONFEZIONE pz.		IMBALLO pz.	MISURA FASCETTA
1104HA00CS	1104HA01CS	50	100	10.000	MM. 3,6
1105HA00CS	1105HA01CS	50	100	5.000	MM. 4,8

PER ALTRI COLORI O MATERIALI DISPONIBILI CONTATTACI

HOLDER	
Material	ABS
Color	natural
UL Class	UL94HB
UL Yellow Card	E 108538
Temperatur ABS	-30° to + 80°C
max. short time temperatur	+ 80°C
ADHESIVE DATA	
Foam	Polyethylene closed cell
Adhesive	standard acrylic
Foam density kg/m ³	100
Tensile strength N/cm ²	100
Service temperatur	-40°C to +100°C
Application temperature	-15°C to + 40°C

REVISIONS			
REV	DATE	18/11/2019	BY
DESCRIPTION			

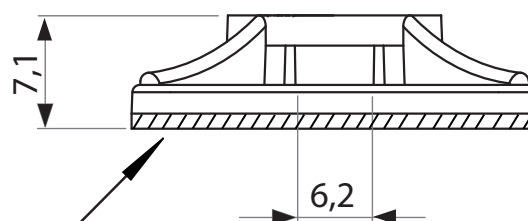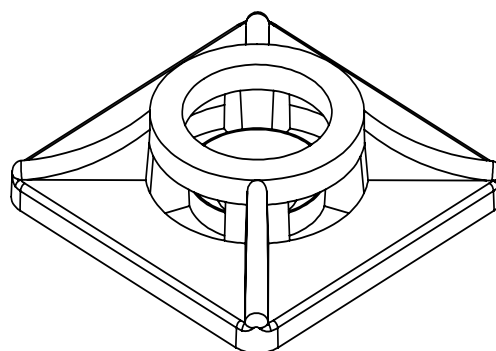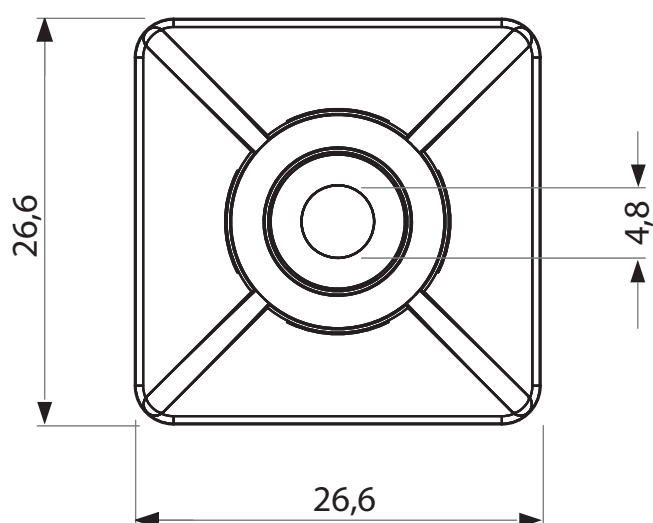

DOUBLE ADHESIVE TAPE
(THICKNESS 1.0 mm)

AGSPLAST

AGSPLAST				TITLE SELF-ADHESIVE CABLE TIE MOUNT	
				MATERIAL ABS / PA 6.6	DATE 18/11/2019
				ADESIVO STANDARD ACRYLIC	DRAWN A.G.
PART NUMBER 1105HA00CS		DRAWING NUMBER 19.1105.G		STANDARD COLOR NATURAL / BLACK	CHECK
SIZE A4	SCALE NTS	UNIT mm	REV A	UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE	APPROVED