



azienda con sistema di gestione per la qualità certificato
ISO 9001:2015




BASETTE B-DIREZIONALI

PER FASCETTE FINO A 4.8mm

SENZA ADESIVO

per fissaggio a vite

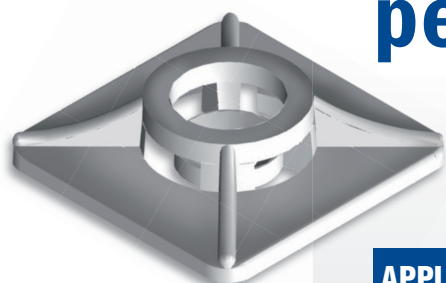

Naturale



Nero

APPLICAZIONI

Ancoraggio di cavi e tubi
Civile industriale

CARATTERISTICHE

SENZA B-ADESIVO


FISSAGGIO A VITE

Su richiesta: variante in PA 6.6

VANTAGGI

Facilità di posa. Adatte per
fascette fino a vedi specifiche

MATERIALE = ABS

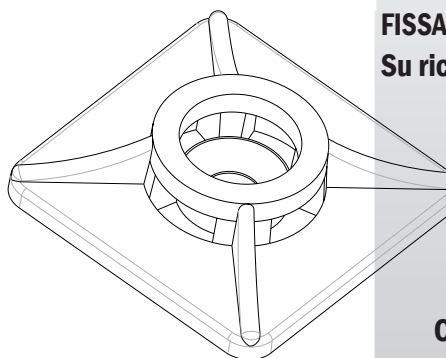

**CONFORMI ALLA NORMATIVA
EUROPEA ROHS**



**TENUTA FIAMMA
UL94 HB**






**APPLICAZIONE
IMMEDIATA**

CODICE Naturale	CODICE Nero	CONFEZIONE pz.			IMBALLO pz.	MISURA FASCETTA
1104HA00V	1104HA01V	25	50	100	10.000	MM. 3,6
1105HA00V	1105HA01V	25	50	100	5.000	MM. 4,8

PER ALTRI COLORI O MATERIALI DISPONIBILI CONTATTACI

HOLDER	
Material	ABS
Color	natural
UL Class	UL94HB
UI Yellow Card	E 108538
Temperatur ABS	-30° to + 80°C
max. short time temperatur	+ 80°C
ADHESIVE DATA	
Foam	
Adhesive	
Foam density kg/m ³	
Tensile strength N/cm ²	
Service temperatur	
Application temperature	

REVISIONS			
REV	DATE	18/11/2019	BY
DESCRIPTION			

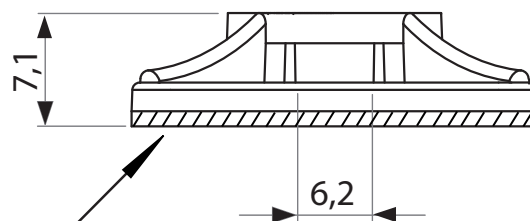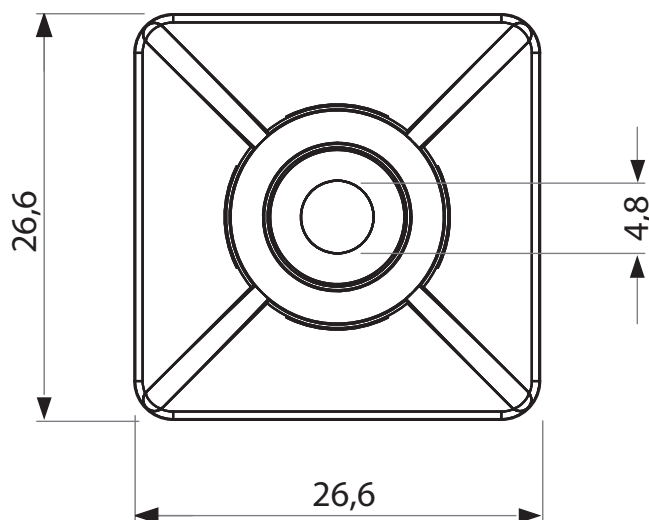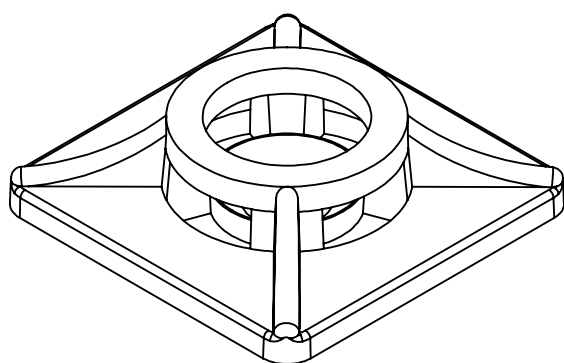

DOUBLE ADHESIVE TAPE
(THICKNESS 1.0 mm)

				TITLE SELF- CABLE TIE MOUNT	
				MATERIAL ABS / PA 6.6	DATE 18/11/2019
				ADESIVO /	DRAWN A.G.
PART NUMBER 1105HA00V		DRAWING NUMBER 19.1105.G		STANDARD COLOR NATURAL / BLACK	CHECK
SIZE A4	SCALE NTS	UNIT mm	REV A	UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE	APPROVED