

BASSETTE MONO-DIREZIONALI PER FASCETTE FINO A 4.0 mm CON ADESIVO SPECIALE



Naturale



Nero



APPLICAZIONI

Acoraggio di cavi e tubi
Civile industriale

CARATTERISTICHE

Supporto adesivo in schiuma base gomma.
Temperatura minima applicazione + 10°.
Resistenza al calore: del B-adesivo - 40° + 60°
Su richiesta: variante in PA 6.6

VANTAGGI

Facilità di posa.
Adatte per fascette fino a: vedi specifiche

MATERIALE = ABS
SU RICHIESTA VARIANTE IN PA 6.6



**CONFORMI ALLA NORMATIVA
EUROPEA ROHS**



**TENUTA FIAMMA
UL94 HB**



**APPLICAZIONE
IMMEDIATA**

CODICE Naturale	CODICE Nero	CONFEZIONE pz.			IMBALLO pz.	MISURA FASCETTA
1129HA00AP	1129HA0AP	25	50	100	10.000	MM. 4,0
1130HA0AP	1130HA0AP	25	50	100	5.000	MM. 6,0

PER ALTRI COLORI O MATERIALI DISPONIBILI CONTATTACI

HOLDER




Material	ABS
Color	natural
UL Class	UL94HB
UI Yellow Card	E 108538
Temperatur ABS	-30° to + 80°C
max. short time temperatur	+80°C

ADHESIVE DATA

Foam	Polyethylene closed cell
Adhesive	Special
Foam density kg/m ³	100
Tensil strength N/cm ²	100
Service temperatur	-40°C to + 60°C
Application temperature	-15°C to + 40°C

REVISIONS

REV	DATE 18/11/2019	BY A.G.
DESCRIPTION		

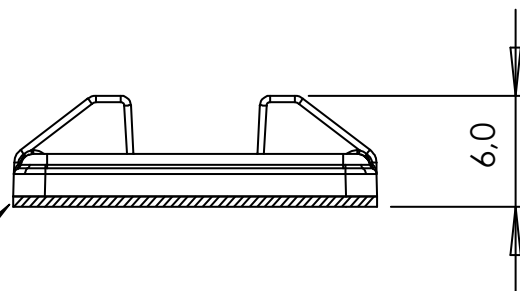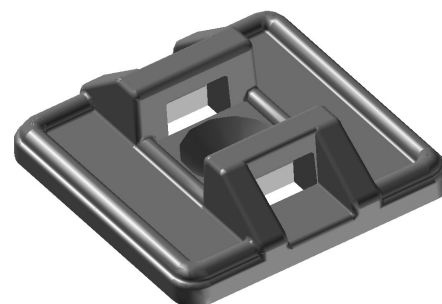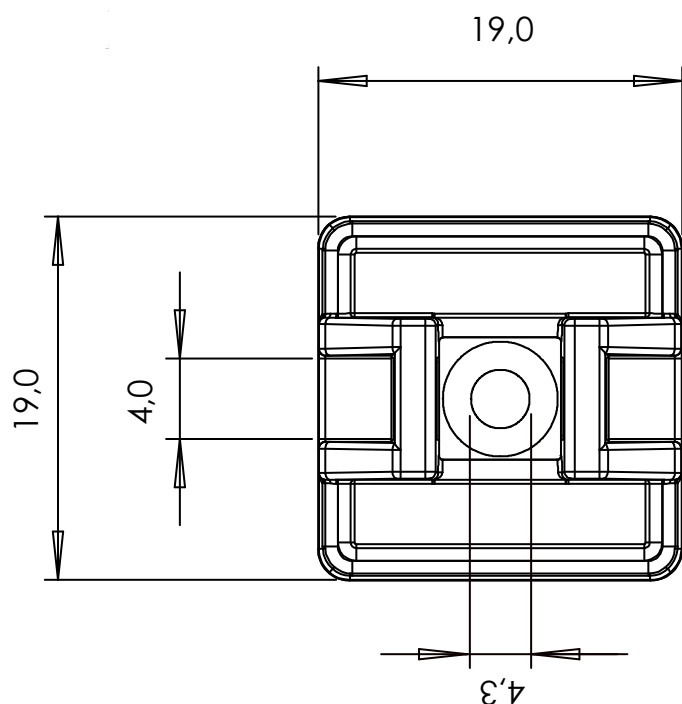

DOUBLE ADHESIVE TAPE
(THICKNESS 1.0 mm)

AGSPLAST

TITLE

SELF- CABLE TIE MOUNT

MATERIAL

ABS / PA 6.6

DATE

18/11/2019

ADESIVO

SPECIAL

DRAWN

A.G.

PART NUMBER

1129HA00AP

DRAWING NUMBER

19.1129.G

STANDARD COLOR

NATURAL / BLACK

CHECK

SIZE

A4

SCALE

NTS

UNIT

mm

REV

A

UNLESS OTHERWISE SPECIFIED TOLERANCE
SEE ABOVE

APPROVED