

BASETTE MONO-DIREZIONALI PER FASCETTE FINO A 4.0 mm CON ADESIVO **STANDARD**



Naturale



Nero



APPLICAZIONI

Acoraggio di cavi e tubi
Civile industriale

CARATTERISTICHE

Supporto adesivo in schiuma base gomma.
Temperatura minima applicazione + 10°.
Resistenza al calore: del B-adesivo - 30° + 60°
Su richiesta: variante in PA 6.6

VANTAGGI

Facilità di posa.
Adatte per fascette fino a: vedi specifiche

MATERIALE = ABS
SU RICHIESTA VARIANTE IN PA 6.6



CONFORMI ALLA NORMATIVA
EUROPEA ROHS



TENUTA FIAMMA
UL94 HB



APPLICAZIONE
IMMEDIATA





EASY PEEL

CODICE Naturale	CODICE Nero	CONFEZIONE pz.		IMBALLO pz.	MISURA FASCETTA
1129HA00AS	1129HA0AS	50	100	10.000	MM. 4,0
1130HA00AS	1130HA0AS	50	100	5.000	MM. 6,0

PER ALTRI COLORI O MATERIALI DISPONIBILI CONTATTACI

HOLDER	
Material	ABS
Color	natural
UL Class	UL94HB
UI Yellow Card	E 108538
Temperatur ABS	-30° to + 80°C
max. short time temperatur	+80°C
ADHESIVE DATA	
Foam	Polyethylene closed cell
Adhesive	STANDARD
Foam density kg/m ³	100
Tensil strength N/cm ²	100
Service temperatur	-30°C to + 60°C
Application temperature	-15°C to + 40°C

REVISIONS			
REV	DATE	18/11/2019	BY
DESCRIPTION			

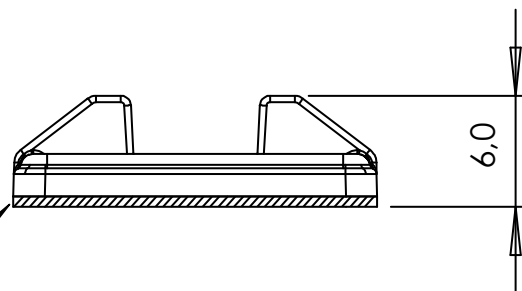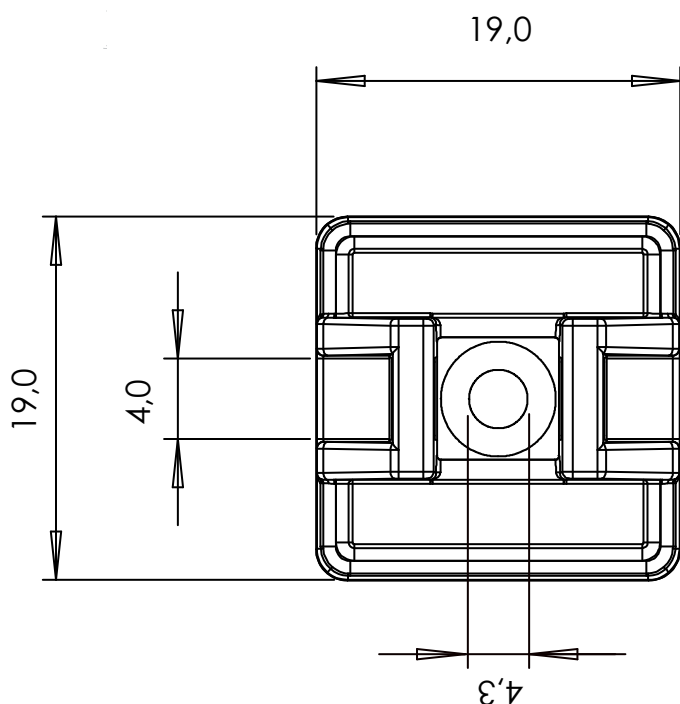

DOUBLE ADHESIVE TAPE
(THICKNESS 1.0 mm)

AGSPLAST

1129HA00AS				TITLE SELF- CABLE TIE MOUNT	
				MATERIAL ABS / PA 6.6	DATE 18/11/2019
				ADESIVO STANDARD	DRAWN A.G.
PART NUMBER		DRAWING NUMBER		STANDARD COLOR	CHECK
1129HA00AS		19.1129.G		NATURAL / BLACK	
SIZE A4	SCALE NTS	UNIT mm	REV A	UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE	APPROVED