

BASETTE MONO-DIREZIONALI PER FASCETTE FINO A 4 mm



CON ADESIVO **ACRILICO STANDARD**



Naturale



Nero



APPLICAZIONI

Acoraggio di cavi e tubi
Civile industriale

CARATTERISTICHE

Supporto adesivo in schiuma base acrilica.
Temperatura minima applicazione + 10°.
Resistenza al calore: del B-adesivo - 40° +100°
Su richiesta: variante in PA 6.6



CONFORMI ALLA NORMATIVA
EUROPEA ROHS



VANTAGGI

Facilità di posa.
Adatte per fascette fino a: vedi specifiche

MATERIALE = ABS
SU RICHIESTA VARIANTE IN PA 6.6



TENUTA FIAMMA
UL94 HB



APPLICAZIONE
IMMEDIATA

CODICE Naturale	CODICE Nero	CONFEZIONE pz.			IMBALLO pz.	MISURA FASCETTA
1129HA00CS	1129HA00CS	25	50	100	10.000	MM. 4,0
1130HA00CS	1130HA00CS	25	50	100	5.000	MM. 6,0

PER ALTRI COLORI O MATERIALI DISPONIBILI CONTATTACI

HOLDER




Material	ABS
Color	natural
UL Class	UL94HB
UI Yellow Card	E 108538
Temperatur ABS	-30° to +80°C
max. short time temperatur	+80°C

ADHESIVE DATA

Foam	Polyethylene closed cell
Adhesive	standard acrylic
Foam density kg/m ³	100
Tensil strength N/cm ²	80
Service temperatur	-35°C to + 100°C
Application temperature	-15°C to + 40°C

REVISIONS

REV	DATE	18/11/2019	BY A.G.
DESCRIPTION			

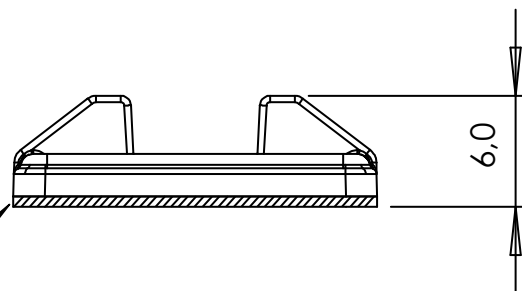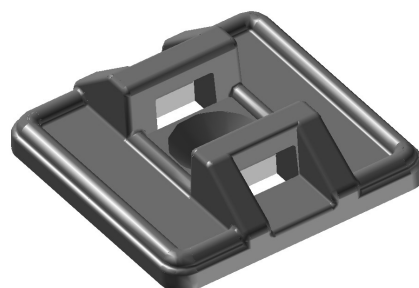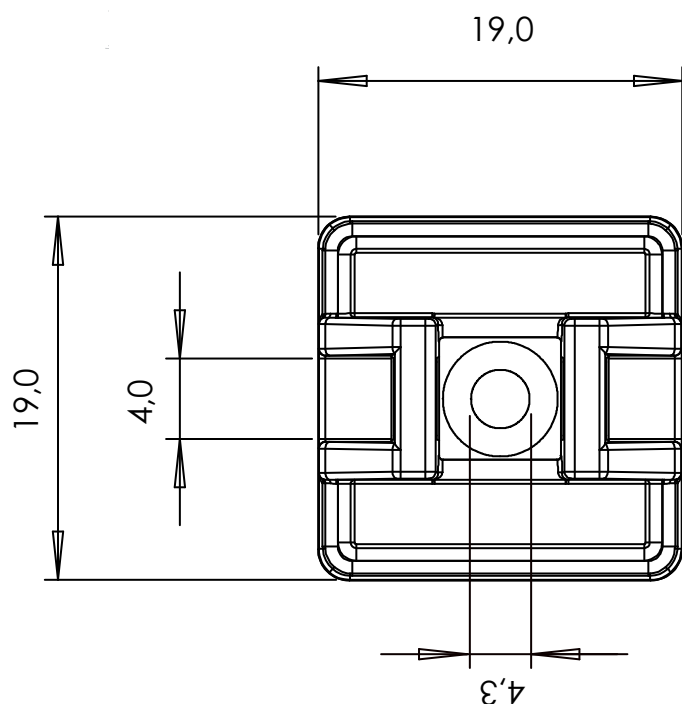

DOUBLE ADHESIVE TAPE
(THICKNESS 1.0 mm)

AGSPLAST

TITLE

SELF- CABLE TIE MOUNT

MATERIAL

ABS / PA 6.6

DATE

18/11/2019

ADESIVO

STANDARD ACRYLIC

DRAWN

A.G.

PART NUMBER

1129HA00CS

DRAWING NUMBER

19.1129.G

STANDARD COLOR

NATURAL / BLACK

CHECK

SIZE

A4

SCALE

NTS

UNIT

mm

REV

A

UNLESS OTHERWISE SPECIFIED TOLERANCE
SEE ABOVE

APPROVED