

BASETTE MONO-DIREZIONALI PER FASCETTE FINO A 6.0 mm CON ADESIVO SPECIALE



Naturale



Nero



APPLICAZIONI

Acoraggio di cavi e tubi
Civile industriale

CARATTERISTICHE

Supporto adesivo in schiuma base gomma.
Temperatura minima applicazione + 10°.
Resistenza al calore: del B-adesivo - 40° + 60°
Su richiesta: variante in PA 6.6

VANTAGGI

Facilità di posa.
Adatte per fascette fino a: vedi specifiche

MATERIALE = ABS
SU RICHIESTA VARIANTE IN PA 6.6



CONFORMI ALLA NORMATIVA
EUROPEA ROHS



TENUTA FIAMMA
UL94 HB






APPLICAZIONE
IMMEDIATA

CODICE Naturale	CODICE Nero	CONFEZIONE pz.			IMBALLO pz.	MISURA FASCETTA
1129HA00AP	1129HA0AP	25	50	100	10.000	MM. 4,0
1130HA0AP	1130HA0AP	25	50	100	5.000	MM. 6,0

PER ALTRI COLORI O MATERIALI DISPONIBILI CONTATTACI

HOLDER	
Material	ABS
Color	natural
UL Class	UL94HB
UI Yellow Card	E 108538
Temperatur ABS	-30° to + 80°C
max. short time temperatur	+80°C
ADHESIVE DATA	
Foam	Polyethylene closed cell
Adhesive	Special
Foam density kg/m ³	100
Tensil strength N/cm ²	100
Service temperatur	-40°C to + 60°C
Application temperature	-15°C to + 40°C

REVISIONS			
REV	DATE	18/11/2019	BY
DESCRIPTION			

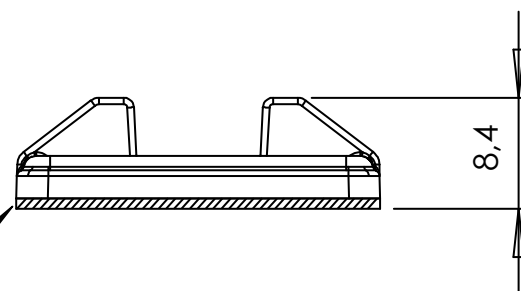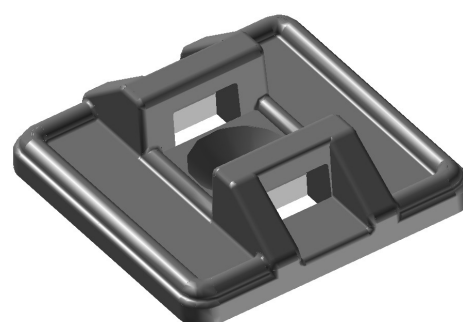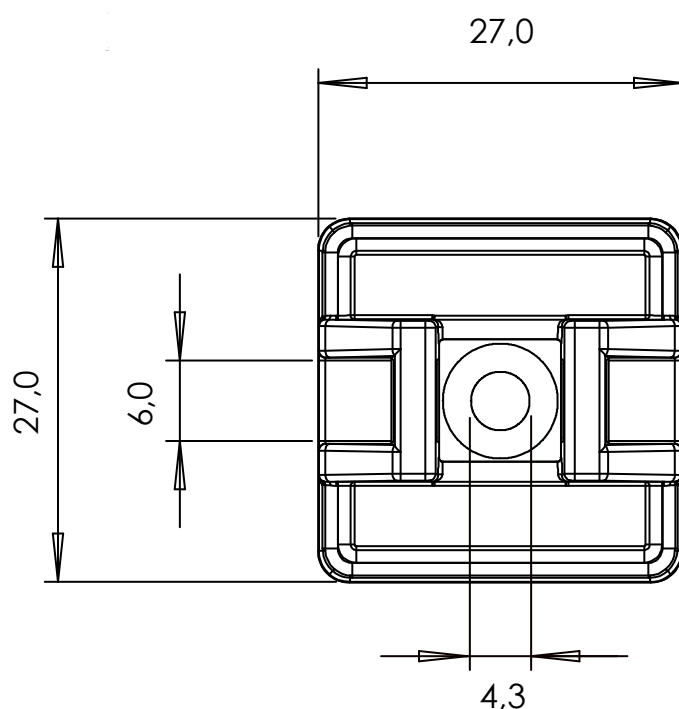

DOUBLE ADHESIVE TAPE
(THICKNESS 1.0 mm)

AGSPLAST

AGSPLAST				TITLE SELF- CABLE TIE MOUNT	
				MATERIAL ABS / PA 6.6	DATE 18/11/2019
				ADESIVO SPECIAL	DRAWN A.G.
PART NUMBER 1130HA00AP		DRAWING NUMBER 19.1130.G		STANDARD COLOR NATURAL / BLACK	CHECK
SIZE A4	SCALE NTS	UNIT mm	REV A	UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE	APPROVED