

BASETTE MONO-DIREZIONALI PER FASCETTE DA FINO A 6 mm



CON ADESIVO **ACRILICO SPECIALE**



Naturale



Nero



APPLICAZIONI

Acoraggio di cavi e tubi
Civile industriale

CARATTERISTICHE

Supporto adesivo in schiuma base acrilica.
Temperatura minima applicazione + 10°.
Resistenza al calore: del B-adesivo - 40° +100°
Su richiesta: variante in PA 6.6

VANTAGGI

Facilità di posa.
Adatte per fascette fino a: vedi specifiche

MATERIALE = ABS
SU RICHIESTA VARIANTE IN PA 6.6



**CONFORMI ALLA NORMATIVA
EUROPEA ROHS**



**TENUTA FIAMMA
UL94 HB**







**APPLICAZIONE
IMMEDIATA**

CODICE Naturale	CODICE Nero	CONFEZIONE pz.			IMBALLO pz.	MISURA FASCETTA
1129HA00CP	1129HA00CP	25	50	100	10.000	MM. 4,0
1130HA00CP	1130HA00CP	25	50	100	5.000	MM. 6,0

PER ALTRI COLORI O MATERIALI DISPONIBILI CONTATTACI

HOLDER	
Material	ABS
Color	natural
UL Class	UL94HB
UI Yellow Card	E 108538
Temperatur ABS	-30° to + 80°C
max. short time temperatur	+80°C
ADHESIVE DATA	
Foam	Polyethylene closed cell
Adhesive	special acrylic
Foam density kg/m ³	100
Tensil strength N/cm ²	80
Service temperatur	-35°C to + 100°C
Application temperature	-15°C to + 40°C

REVISIONS			
REV	DATE	18/11/2019	BY
DESCRIPTION			

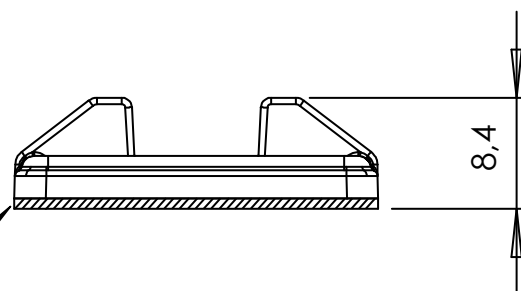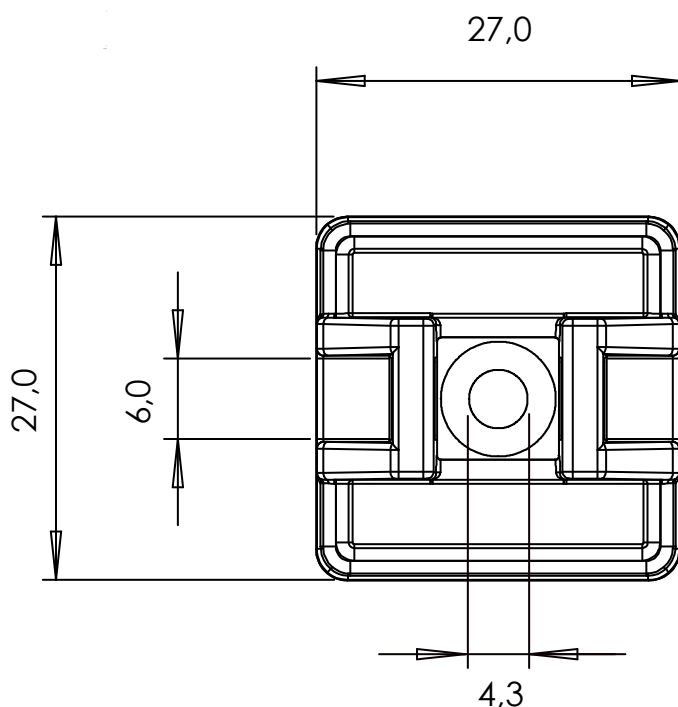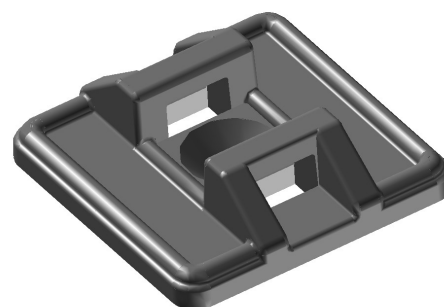

DOUBLE ADHESIVE TAPE
(THICKNESS 1.0 mm)

AGSPLAST

AGSPLAST				TITLE SELF- CABLE TIE MOUNT	
				MATERIAL ABS / PA 6.6	DATE 18/11/2019
				ADESIVO SPECIAL ACRYLIC	DRAWN A.G.
PART NUMBER 1130HA00CP		DRAWING NUMBER 19.1130.G		STANDARD COLOR NATURAL / BLACK	CHECK
SIZE A4	SCALE NTS	UNIT mm	REV A	UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE	APPROVED