

BASSETTE MONO-DIREZIONALI PER FASCETTE FINO A 6.0 mm PER FISSAGGIO A VITE



Naturale



Nero



APPLICAZIONI

Acoraggio di cavi e tubi
Civile industriale

CARATTERISTICHE

Resistenza al calore: del ABS - 30° + 80°

VANTAGGI

Facilità di posa.
Adatte per fascette fino a: vedi specifiche

MATERIALE = ABS
SU RICHIESTA VARIANTE IN PA 6.6



**CONFORMI ALLA NORMATIVA
EUROPEA ROHS**



**TENUTA FIAMMA
UL94 HB**






**APPLICAZIONE
IMMEDIATA**

CODICE Naturale	CODICE Nero	CONFEZIONE pz.		IMBALLO pz.	MISURA FASCETTA
1129HA00V	1129HA01V	50	100	10.000	MM. 3,6
1130HA00V	1130HA01V	50	100	5.000	MM. 4,8

PER ALTRI COLORI O MATERIALI DISPONIBILI CONTATTACI

HOLDER	
Material	ABS
Color	natural
UL Class	UL94HB
UI Yellow Card	E 108538
Temperatur ABS	-30° to + 80°C
max. short time temperatur	+80°C
ADHESIVE DATA	
Foam	
Adhesive	
Foam density kg/m ³	
Tensil strength N/cm ²	
Service temperatur	
Application temperature	

REVISIONS			
REV	DATE	18/11/2019	BY
DESCRIPTION			

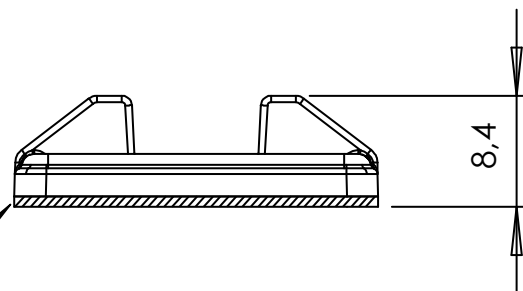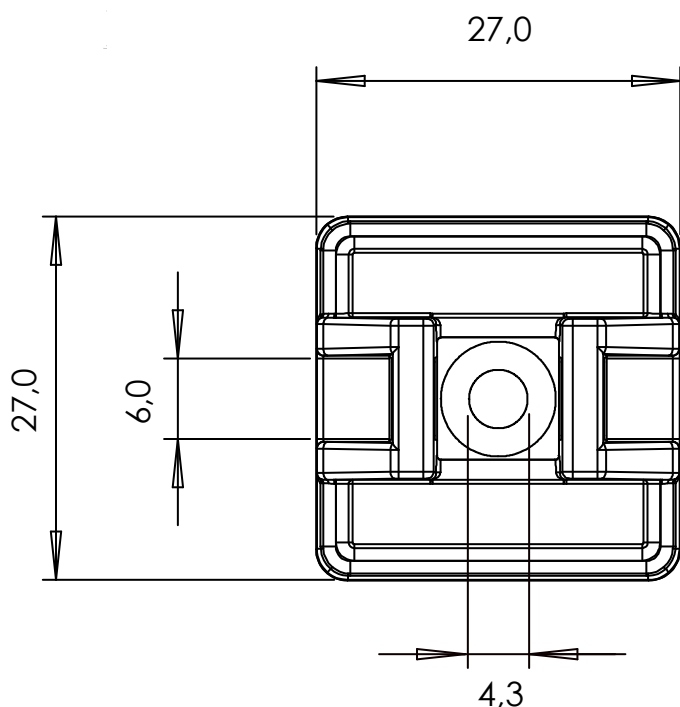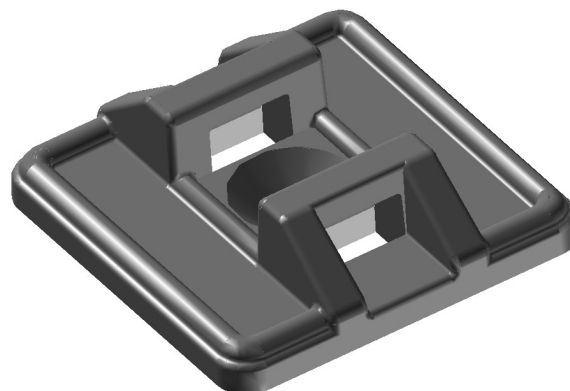

DOUBLE ADHESIVE TAPE
(THICKNESS 1.0 mm)

AGSPLAST

AGSPLAST				TITLE SELF- CABLE TIE MOUNT	
				MATERIAL ABS / PA 6.6	DATE 18/11/2019
				ADESIVO	DRAWN A.G.
PART NUMBER 1130HA00V		DRAWING NUMBER 19.1130.G		STANDARD COLOR NATURAL / BLACK	CHECK
SIZE A4	SCALE NTS	UNIT mm	REV A	UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE	APPROVED