


BASETTE MONO-DIREZIONALI PER FASCETTE FINO A 4.9 mm CON ADESIVO SPECIALE



Naturale



Nero

APPLICAZIONI

Acoraggio di cavi e tubi
Civile industriale

CARATTERISTICHE

Supporto adesivo in schiuma base gomma.
Temperatura minima applicazione + 10°.
Resistenza al calore: del B-adesivo - 40°
+100° Su richiesta: variante in ABS



CONFORMI ALLA NORMATIVA
EUROPEA ROHS



VANTAGGI

Facilità di posa.
Adatte per fascette fino a: vedi specifiche

MATERIALE = PA 6.6
SU RICHIESTA VARIANTE IN ABS



TENUTA FIAMMA
UL94 V2





APPLICAZIONE
IMMEDIATA

CODICE Naturale	CODICE Nero	CONFEZIONE pz.			IMBALLO pz.	MISURA FASCETTA
1181AA01AP	1181AA01AP	25	50	100	10.000	MM. 4.9
1183AA00AP	1183AA01AP	25	50	100	5.000	MM. 8.6

PER ALTRI COLORI O MATERIALI DISPONIBILI CONTATTACI

HOLDER	
Material	NYLON PA 6.6
Color	natural
UL Class	UL94V2
UI Yellow Card	E 108538
Temperatur ABS	-40° to +100°C
max. short time temperatur	+110°C
ADHESIVE DATA	
Foam	Polyethylene closed cell
Adhesive	Special
Foam density kg/m ³	100
Tensil strength N/cm ²	100
Service temperatur	-40°C to + 60°C
Application temperature	-15°C to + 40°C

REVISIONS			
REV	DATE	18/09/2020	A.G.
DESCRIPTION			

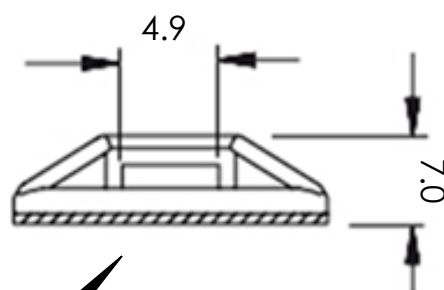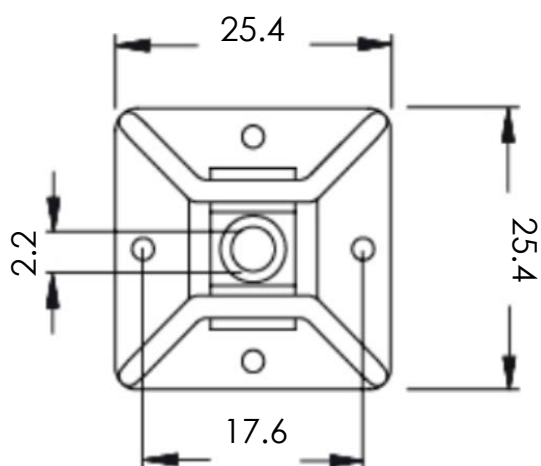

DOUBLE ADHESIVE TAPE
(THICKNESS 1.0 mm)

AGSPLAST

AGSPLAST				TITLE SELF- CABLE TIE MOUNT	
				MATERIAL PA 6.6	DATE 18/09/2020
				ADESIVO SPECIAL	DRAWN A.G.
PART NUMBER 1181AA00AP		DRAWING NUMBER 19.1129.G		STANDARD COLOR NATURAL / BLACK	CHECK
SIZE A4	SCALE NTS	UNIT mm	REV A	UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE	APPROVED