



azienda con sistema di gestione per la qualità certificato

ISO 9001:2015



SUPPORTI ADESIVI IN PVC PER CAVO PIATTO Adesivo **STANDARD**



APPLICAZIONI

Posa di cavi e fili su superfici piane.
Civile industriale hobbistica.

CARATTERISTICHE

B-adesivo **STANDARD**

Supporti per cavo **PIATTO**.
Temperatura minima applicazione **+10°**.
Resistenza al calore: del B-adesivo **-30°+60°**

VANTAGGI

Facilità di posa su superfici piane e cavo piatto o fi li senza eseguire forature. Facile e veloce applicazione grazie al sup-porto adesivo.
Applicabile su quasi tutti i tipi di materiali.

MATERIALE = PVC

MATERIAL = PVC



**CONFORMI ALLA NORMATIVA
EUROPEA ROHS II**

**TENUTA FIAMMA
UL94-V2 HB**



**APPLICAZIONE
IMMEDIATA**

CODICE	ALTEZZA MAX.	CONFEZIONE	IMBALLO
2514CC11CS	7.0 mm	100 pz	5.000 pz

PER ALTRI COLORI E MATERIALE DISPONIBILI CONTATTACI

HOLDER	
Material	PVC
Color	natural
UL Class	UL94HB
UI Yellow Card	E 108538
Temperatur POLIAMIDE	-25° to + 70°C
max. short time temperatur	/
ADHESIVE DATA	
Foam	Polyethylene closed cell
Adhesive	standard
Foam density kg/m ³	100
Tensil strength N/cm ²	80
Service temperatur	-25°C to + 70°C
Application temperature	-15°C to + 40°C

REVISIONS			
	REV	DATE 12/11/2019	BY A.G.
	DESCRIPTION		

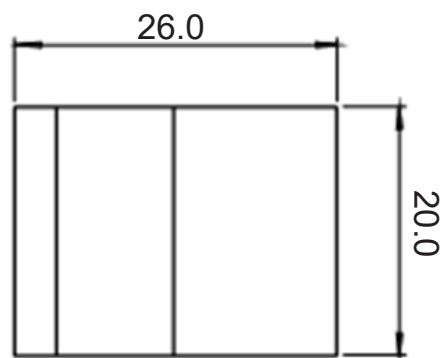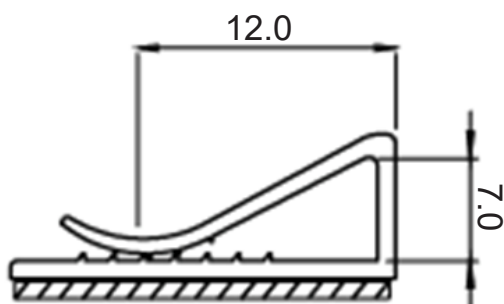

DOUBLE STANDARD ADHESIVE TAPE
(THICKNESS 0.8 mm)

AGSPLAST

AGSPLAST				TITLE SELF-ADHESIVE CABLE CLIP	
				MATERIAL PVC	DATE 12/11/2019
				ADESIVO STANDARD	DRAWN A.G.
PART NUMBER 2514CC11AS		DRAWING NUMBER 19.1039.G		COLOR GRAY	CHECK
SIZE A4	SCALE NTS	UNIT mm	REV A	UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE	APPROVED