



SUPPORTI A VITE PA 6.6 PER FASCETTA

APPLICAZIONI

Posa di cavi e fili su superfici piane.
Civile industriale hobbistica.

VANTAGGI

Facilità di posa per cavo o fili
Applicabile su quasi tutti i materiali.

CARATTERISTICHE


MATERIALE = PA .6.6



Bianco



Nero

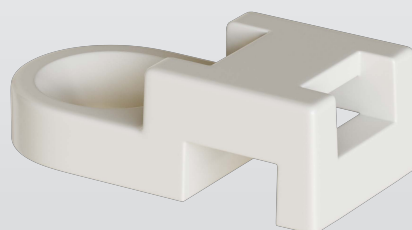

**CONFORMI ALLA NORMATIVA
EUROPEA ROHS II**



**TENUTA FIAMMA
UL94-V2**



**APPLICAZIONE
IMMEDIATA**




CODICE Naturale	CODICE Nero	Misura max fascetta	CONFEZIONE pz.	IMBALLO pz.	
1062AA00S	1062AA00S	mm 5	100	1.000	
				10.000	

PER ALTRI COLORI O MATERIALI DISPONIBILI CONTATTACI

HOLDER	
Material	NYLON PA 6.6
Color	natural
UL Class	UL94HB
UI Yellow Card	E 108538
Temperatur POLIAMIDE	-40° to + 100°C
max. short time temperatur	+ 110°C

DIM.	TOL
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DATE	12/11/2019	BY A.G.
DESCRIPTION			

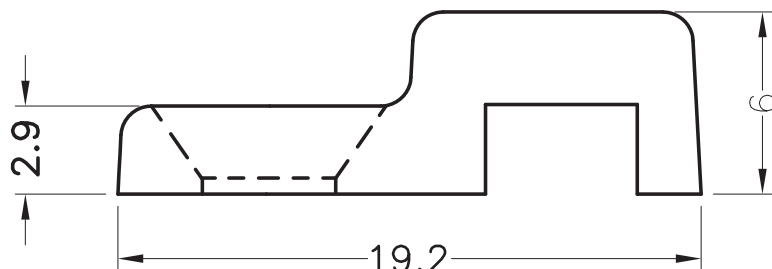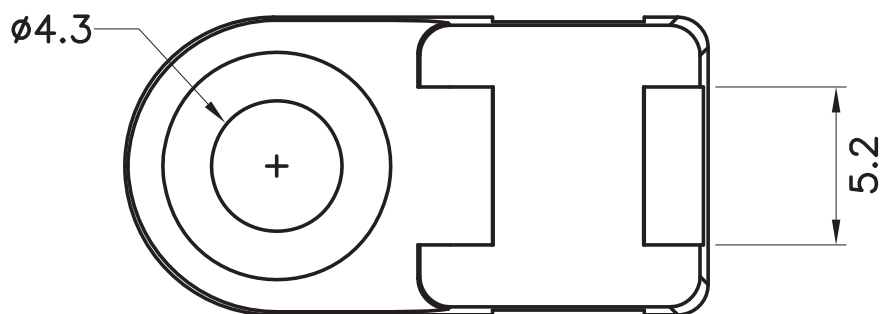

AGSPLAST

AGSPLAST				TITLE SELF-ADHESIVE CABLE CLIP	
				MATERIAL NYLON 66 UL94-V2	DATE 12/11/2019
				ADESIVO STANDARD ADHESIVE RUBBER BASE	DRAWN A.G.
PART NUMBER 1062AA00S		DRAWING NUMBER 19.1062.G		STANDARD COLOR NATURAL / BLACK	CHECK
SIZE A4	SCALE NTS	UNIT mm	REV A	UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE	APPROVED